

DUT



Caratteristiche: diffusori a ugello a lancio profondo orientabili con angolo massimo di 30° nella versione base DUT e nella versione con serranda DUT-S.

Costruzione: alluminio satinato naturale con primer trasparente.

Impiego: a soffitto e a parete in mandata. Altezza di installazione: 2,4-11,5 m.

Fissaggio: mediante viti frontali sul collare del diffusore al canale o al raccordo per canale circolare.

Accessori:

- Coprivite (CV).
- Raccordo per tubo flessibile (RF).
- Raccordo per canale circolare (RC).

Characteristics: jet diffusers for long throw with orientable nozzle for a maximum angle of 30°. Normal version DUT and version with damper DUT-S.

Finishing: natural satinized aluminium with transparent primer.


Utilization: for ceiling or wall installation for air supply. Installation height: 2,4-11,5 m.

Fixing: by frontal screws mounted on the diffuser ring to the duct or to the connector on circular duct.

Accessories:

- Covers screws (CV).
- Flexible duct connection (RF).
- Circular duct connection (RC).

DISEGNI | DRAWINGS


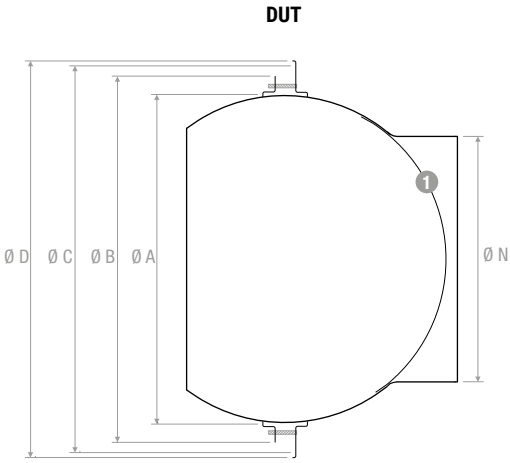


1 Serranda | Damper (DUTS)

ØN	ØA	ØB	ØC	ØD
mm	mm	mm	mm	mm
80	160	203	220	254
110	200	246	266	285
150	300	350	368	387
200	400	448	472	485
230	400	448	472	485
250	400	448	472	485
300	400	448	472	485

MONTAGGIO | MOUNTING

Montaggio su canale e su parete | Mounting on duct and at wall

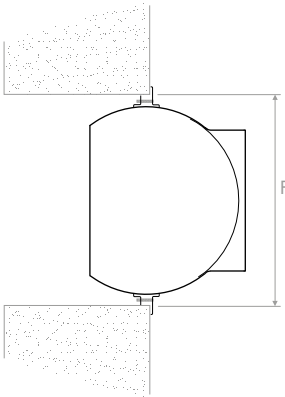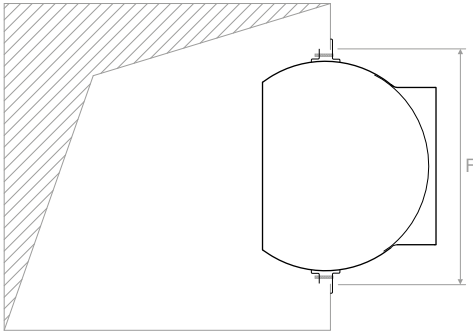


Ugello F | Nozzle F

DUT 80	DUT 110	DUT 150	DUT 200	DUT 230	DUT 250	DUT 300
mm	mm	mm	mm	mm	mm	mm
207	250	354	452	452	452	452

Dimensioni foro su canale e su parete | Hole size on duct and at wall

MONTAGGIO | MOUNTING

Montaggio su canale e su parete | Mounting on duct and at wall

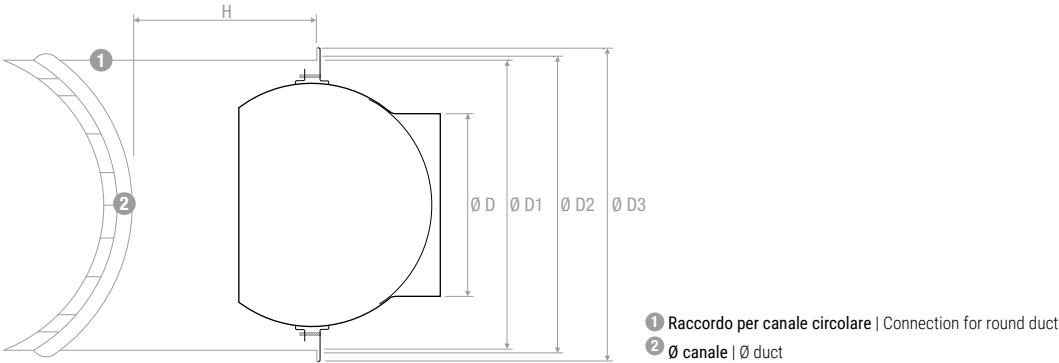


Modello Model	Fori su 360° Holes on 360°	D2	D	D1	D3	H	Ø Canale Ø Duct
	N°	mm	mm	mm	mm	mm	mm
RCDU 40	3F Ø4,2	119	40	109	129	150	160-450
RCDU 50	3F Ø4,2	148	50	138	158	150	200-500
RCDU 80	3F Ø5	220	80	210	230	200	315-630
RCDU 110	3F Ø5	266	110	251	282	200	250-800
RCDU 150	6F Ø5	368	150	358	378	300	500-800
RCDU 200	6F Ø5	472	200	460	480	350	500-1000
RCDU 230	6F Ø5	472	230	460	480	350	500-1000
RCDU 250	6F Ø5	472	250	460	480	350	500-1000
RCDU 300	6F Ø5	472	300	460	480	350	500-1000

Montaggio con tubo flessibile | Mounting with flexible duct



Modello Model	ØA	ØB	C	D	E	ØF int	L
	mm	mm	mm	mm	mm	mm	mm
RFDU 40	78	130	40	40	40	110	120
RFDU 50	98	160	60	40	60	135	160
RFDU 80	158	235	60	100	60	205	220
RFDU 110	198	280	60	100	60	250	220
RFDU 150	313	380	60	170	60	350	290
RFDU 200	398	480	60	170	60	450	290
RFDU 230	398	480	60	170	60	450	290
RFDU 300	398	480	60	170	60	450	290

Montaggio in batteria | Mounting on panel

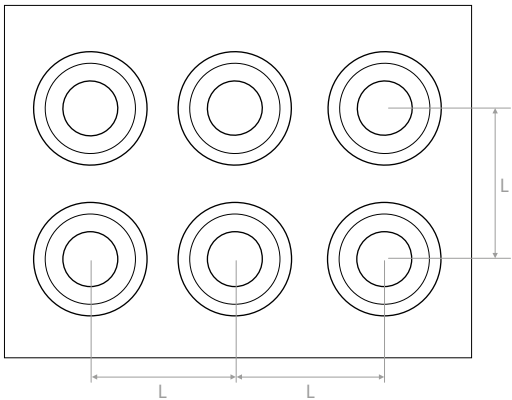

Ugello Nozzle	L min. (mm)
DUT 80	300
DUT 110	350
DUT 150	430
DUT 200	430
DUT 230	550
DUT 250	550
DUT 300	550

TABELLA DI SELEZIONE | TECHNICAL DATA

Modello Model	A _x [m²]	Q [m³/h]		L _{WA} [dB(A)]		X _(0,25) - Y _(0,25) [m]		Dp _t [Pa]	
		min	max	min	max	min	max	min	max
80	0,0050	60	230	27	54	7,8	20,4	10	70
110	0,0095	120	400	29	55	10,5	26,3	10	70
150	0,0177	240	680	31	58	13,1	28,3	10	70
200	0,0314	400	1200	33	61	14,6	32,4	10	70
230	0,0415	570	1580	36	62	15,9	35,7	10	70
250	0,0491	690	1850	37	64	17,5	38,8	10	70
300	0,0707	900	2650	39	67	18,2	42,9	10	70

VERSIONI DISPONIBILI | VERSIONS AVAILABLE

Modello Model	DUT	DUTS	CV
80			
110			
150			
200			
230			
250			
300			

DUT

VERSIONI DISPONIBILI | VERSIONS AVAILABLE

RACCORDO DU TUBO ZINCATO MODELLO RCDU | GALVANIZED DUCT FITTING MODEL RCDU

DUT	Raccordo tubo zincato
Ø mm	Ø mm
40	160
40	200
40	250
40	315
40	355
40	400
40	450
50	200
50	250
50	315
50	355
50	400
50	450
50	500
80	315
80	355
80	400
80	450
80	500
80	560
80	630
110	315
110	355
110	400
110	450
110	500
110	560
110	630
110	710
110	800
150	500
150	560
150	630
150	710
150	800
200	500
200	560
200	630
200	710
200	800
200	900
200	1000

RACCORDO DU TUBO FLEX MODELLO RFDU | FLEXIBLE HOSE FITTING MODEL RFDU

DUT	Tubo flex Flex tube
Ø mm	Ø mm
40	80
50	100
80	160
110	200
150	250
150	315
200	400