

GURG



Caratteristiche: Diffusori a ugelli orientabili su pannello rettangolare.

Costruzione: piastra in acciaio, cornice in alluminio, ugelli in nylon bianco.
Finitura: bianco RAL 9016 opaco.

Fissaggio: installazione mediante fori per viti, clips a richiesta.

Accessori:

- Plenum in acciaio zincato:
 - Con o senza isolamento.
 - Con o senza equalizzatore.
- Serranda di taratura in acciaio zincato con alette a funzionamento contrapposto.
- Controtelaio di montaggio in acciaio zincato.

Characteristics: diffusers with adjustable nozzles arranged on a rectangular panel.

Finishing: steel plate, aluminium frame, white nylon nozzles. Finish: white RAL 9016 matt.


Fixing: installation by screw holes, clips on request.

Accessories:


- Galvanized steel plenum box:
 - With or without insulation.
 - With or without air equalizer.
- Calibration damper made of galvanized steel with opposed blades.
- Mounting frames made of galvanized steel sheet.

DISEGNI | DRAWINGS

GURG

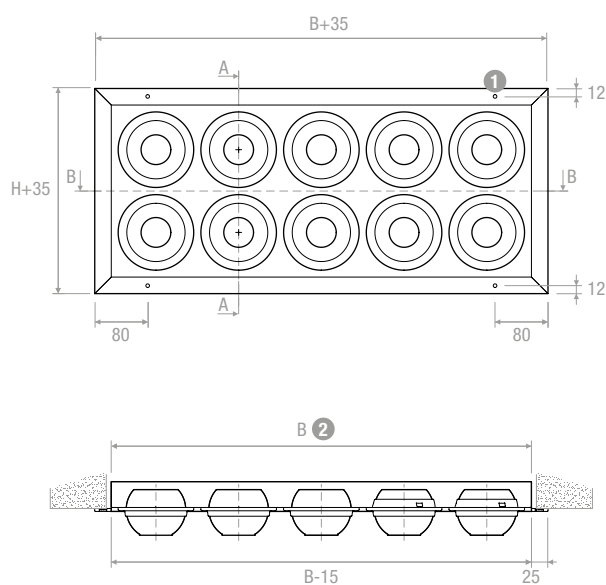


- 1 Ø 3,5 foro svasato | Countersunk hole
- 2 Dimensioni foro | hole size
- 3 Interasse ugelli | Interaxis nozzles

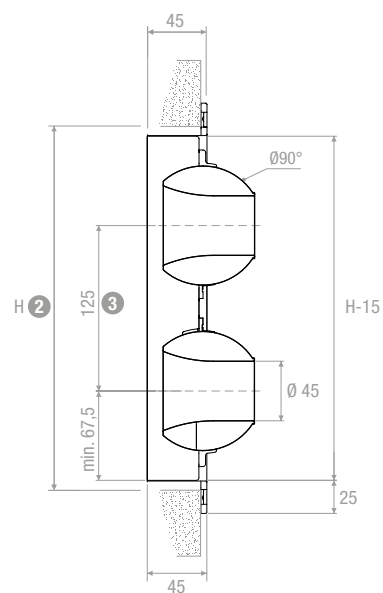


PLENUM | PLENUM


PBZ1




PBZ2



PBZI1



PBZI2



Plenum isolato esternamente spessore 6 mm
Plenum externally insulated thickness 6 mm

TABELLA DI SELEZIONE | TECHNICAL DATA

Modello Model	Numero ugelli Number nozzles	Q [m³/h]		L _{WA} [dB(A)]		X _(0,25) -Y _(0,25) [m]		Dp _t [Pa]	
		min	max	min	max	min	max	min	max
275x150	2	30	110	28	44	4,5	10,5	10	65
275x275	4	60	230	30	47	5,4	19,6	10	65
275x400	6	90	340	33	54	6	22,5	10	65
400x150	3	40	170	28	44	4,5	10,5	10	65
400x275	6	90	340	30	47	5,4	19,6	10	65
400x400	9	130	510	33	54	6	22,5	10	65
525x150	4	60	230	28	44	4,5	10,5	10	65
525x275	8	110	460	30	47	5,4	19,6	10	65
525x400	12	170	690	33	54	6	22,5	10	65
650x150	5	70	230	28	44	4,5	10,5	10	65
650x275	10	140	570	30	47	5,4	19,6	10	65
650x400	15	210	860	33	54	6	22,5	10	65
775x150	6	90	340	28	44	4,5	10,5	10	65
775x275	12	170	690	30	47	5,4	19,6	10	65
775x400	18	260	1030	33	54	6	22,5	10	65
900x150	7	100	400	28	44	4,5	10,5	10	65
900x275	14	200	800	30	47	5,4	19,6	10	65
900x400	21	300	1200	33	54	6	22,5	10	65
1025x150	8	110	460	28	44	4,5	10,5	10	65
1025x275	16	230	920	30	47	5,4	19,6	10	65
1025x400	24	340	1370	33	54	6	22,5	10	65

VERSIONI DISPONIBILI | VERSIONS AVAILABLE



BxH	Ugelli per diffusore Nozzles for diffuser	File ugelli Nozzles file	GURG	SC	CT	PBZ1	PBZ11	PBZ2	PBZ12
mm	N°	N°							
275x150	2	1							
275x275	4	2							
275x400	6	3							
400x150	3	1							
400x275	6	2							
400x400	9	3							
525x150	4	1							
525x275	8	2							
525x400	12	3							
650x150	5	1							
650x275	10	2							
650x400	15	3							
775x150	6	1							
775x275	12	2							
775x400	18	3							
900x150	7	1							
900x275	14	2							
900x400	21	3							
1025x150	8	1							
1025x275	16	2							
1025x400	24	3							