


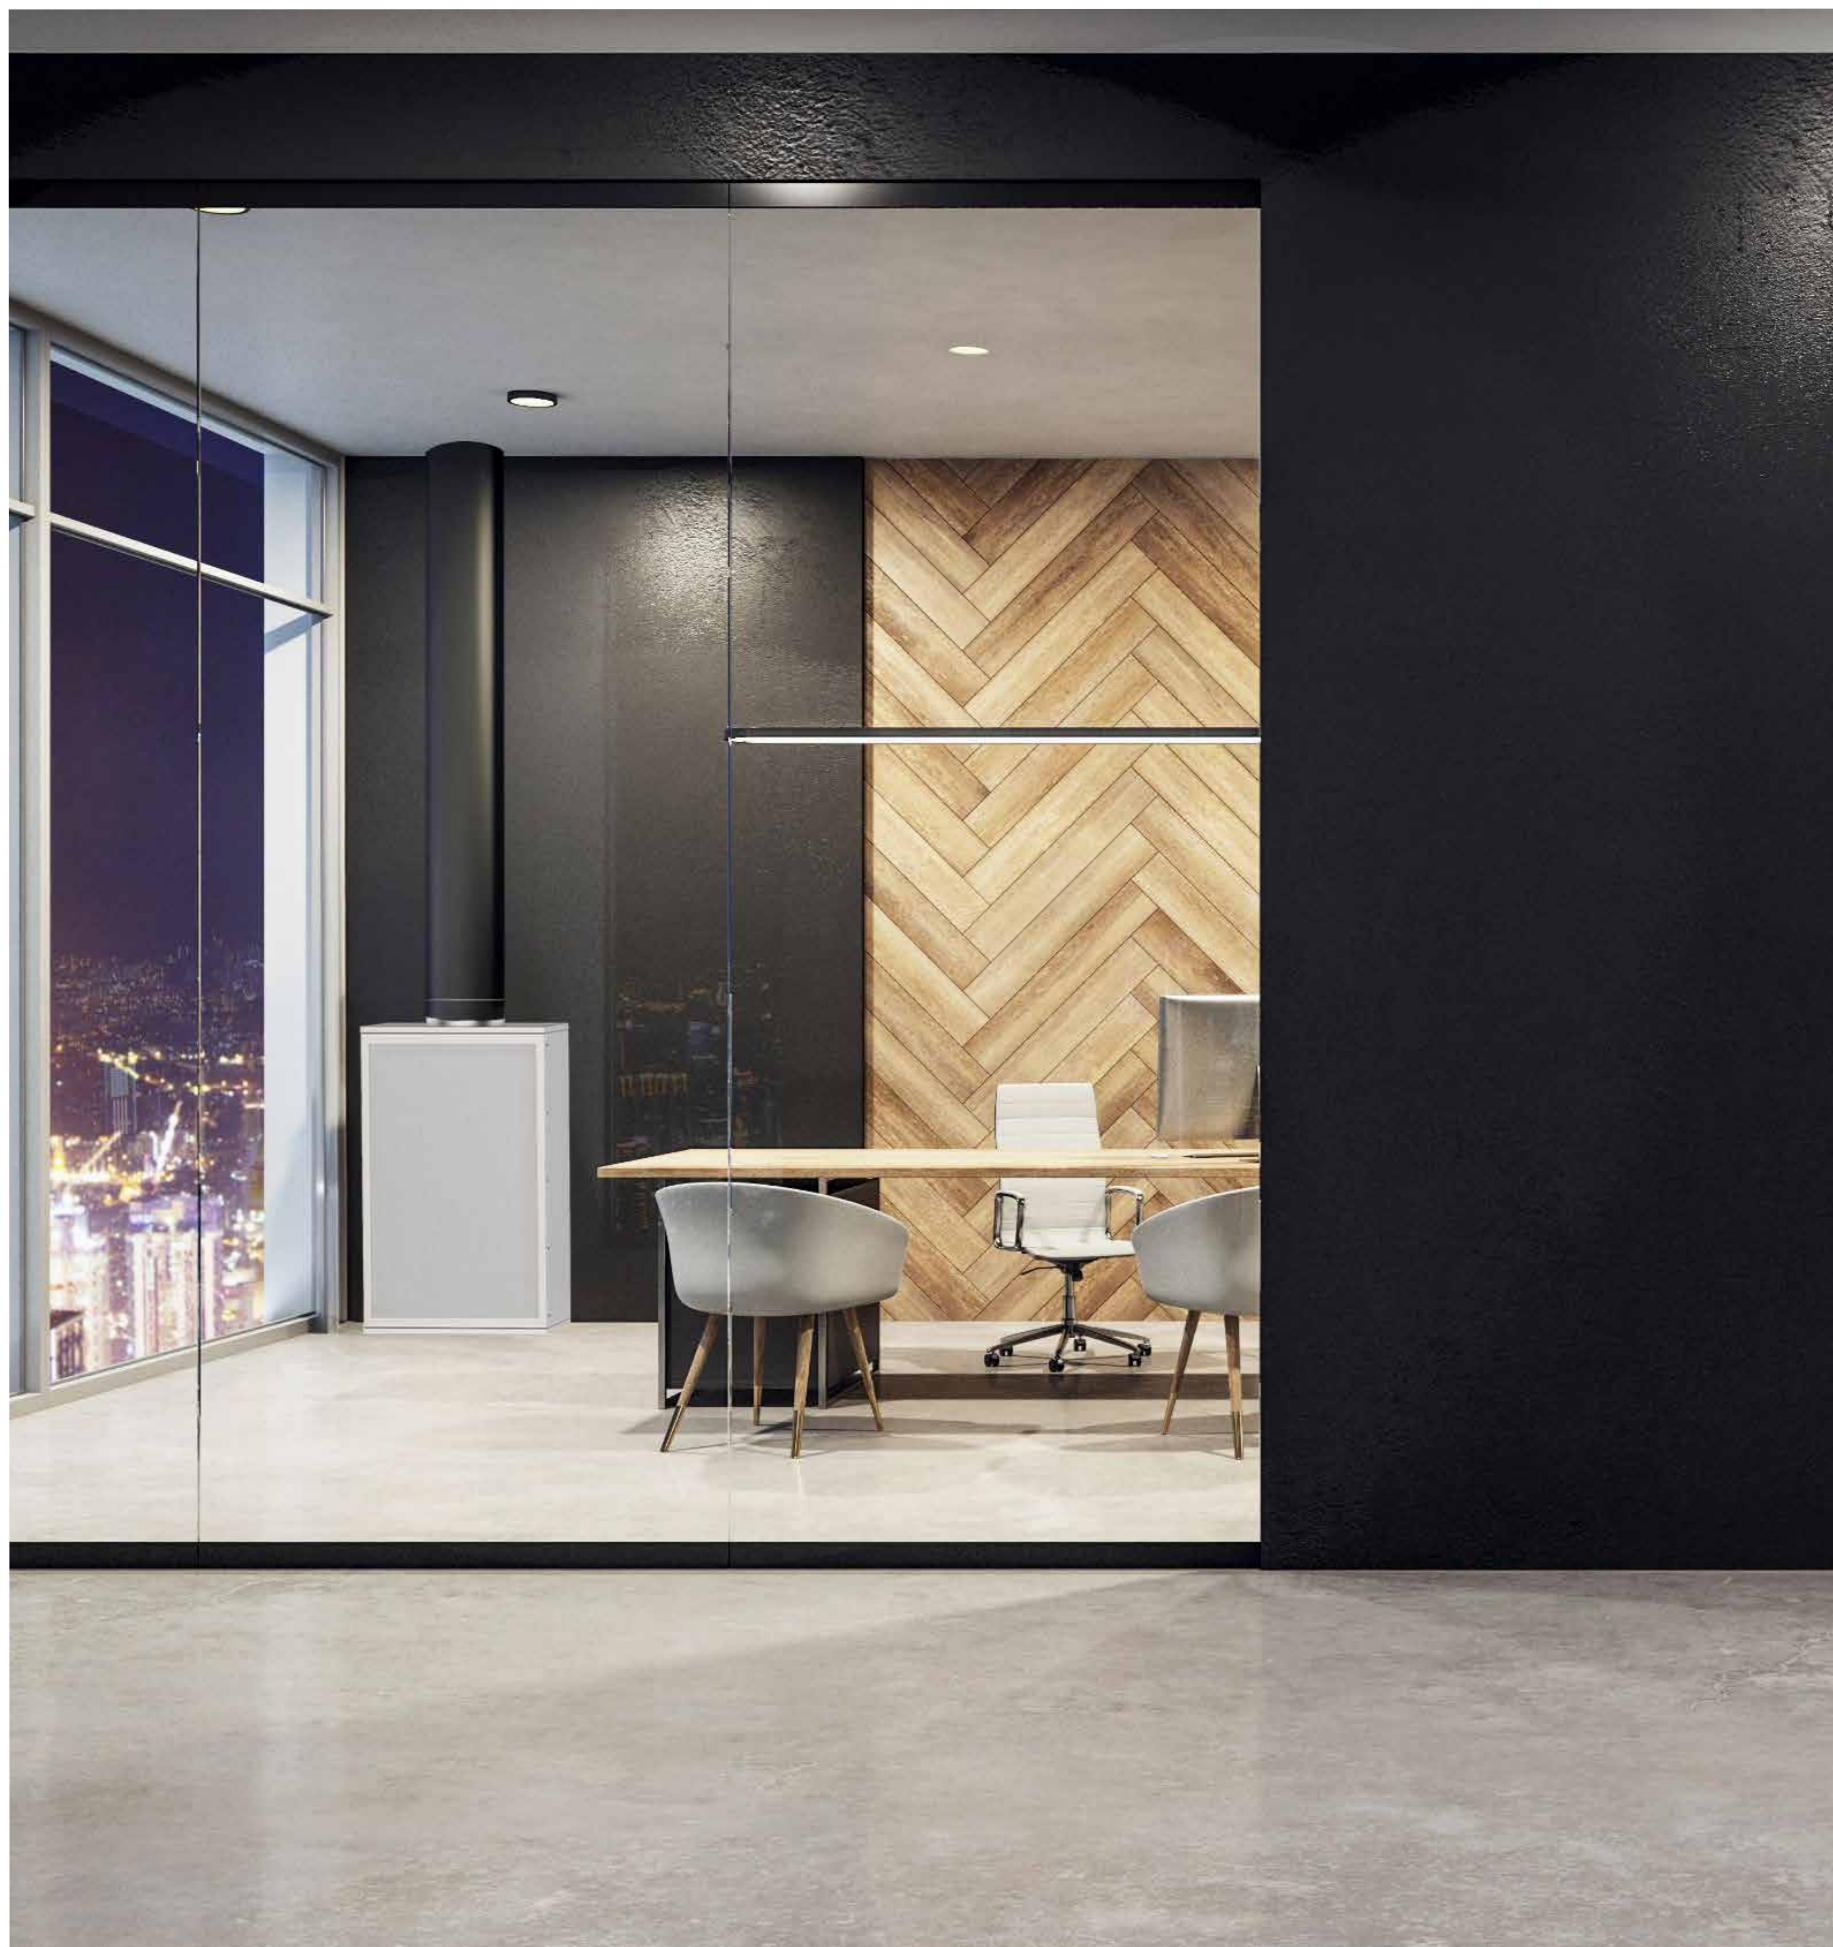

Product manual

Displacement diffuser

SD-P

Air distribution


Version 1.0.0
Date: 24.04.2025.

AIR DISPLACEMENT DIFFUSER SD-P

- Rectangular perforated displacement diffuser for installation against a wall or column
- For cooling and fresh air supply in industrial and commercial spaces
- Low turbulence, low outlet velocity
- Increased air quality in residence areas
- For temperature differences up to 6K
- Made out of steel sheet, standard powder coating RAL 9010
- Standard heights: H = 750, 1000, 1250 and 1500

Options:

- Damper
- Filter

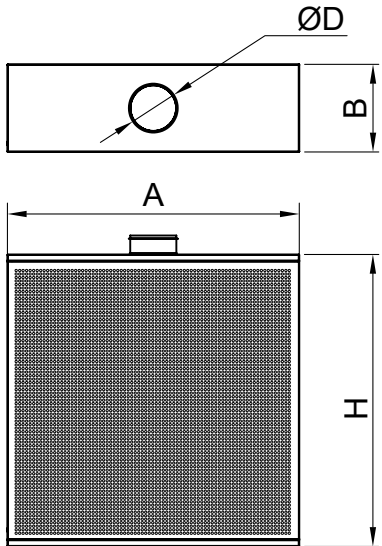

▼ DIFFUSER SD-P

▼ ORDERING KEY


PRODUCT
CALCULATION
SOFTWARE

PRODUCT OVERVIEW

H/A	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
750	200	200	250	250	250	250	315	315	315	315	315	315	315	315	315	315	315
1000	200	200	250	250	250	250	315	315	315	315	315	315	315	315	315	315	315
1250	200	200	250	250	250	250	315	315	315	315	315	315	315	315	315	315	315
1500	200	200	250	250	250	250	315	315	315	315	315	315	315	315	315	315	315
B	300	300	350	350	350	350	400	400	400	400	400	400	400	400	400	400	450

Filter

- stabilization filter placed inside diffuser, made out of G4 or G2 class filtration material

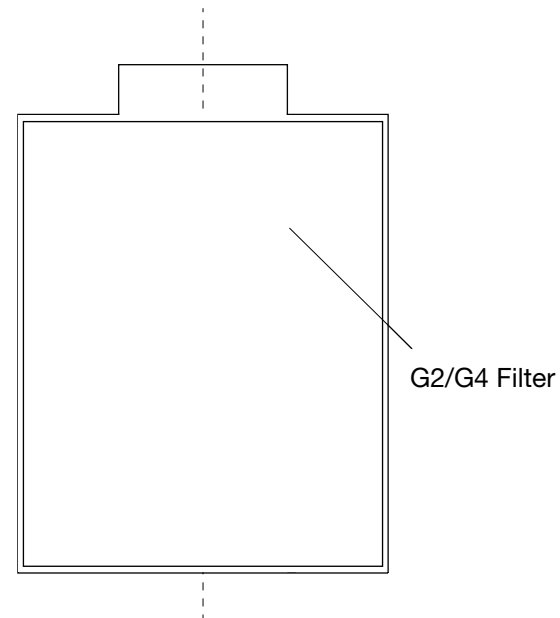

G2/G4 Filter




▼ DIFFUSER SD-P

▼ ORDERING KEY

PRODUCT
CALCULATION
SOFTWARE

Discharge pattern SD-P

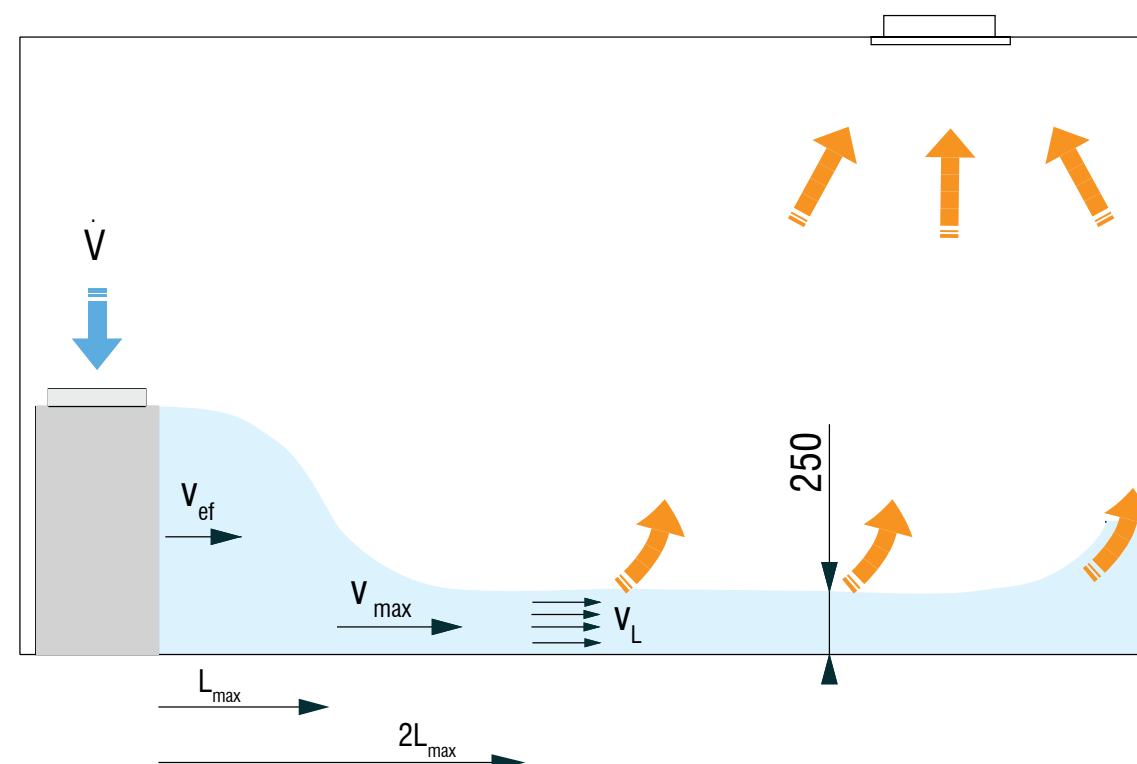


PRODUCT OVERVIEW



▼ DIFFUSER SD-P

▼ ORDERING KEY



Ordering key SD-P

(1) Diffuser		(2) Size		(3) Connection diameter		(4) Filter		(5) RAL
SD-P	-	400x750	-	200	-	G2	-	9010

- (1) Diffuser
SD-P

(4) Filter: G2, G4
- (2) Size:
A X H

(5) RAL
- (3) Connection diameter øD



ORDERING KEYS



AIR DISTRIBUTION

Images are for informational purposes only and may differ from the actual product.
Follow the latest versions of the catalog on the website.

📍 Gradna 78A, 10430 Samobor, Croatia
☎ +385 (0)1 33 62 513
✉ info@klimaoprema.com
🌐 www.klimaoprema.com