



Product manual

Linear floor diffusers

PDI


Air distribution

Version 1.0.3
Date: 24.04.2025.



PDI

- Floor diffuser is used for air supply to large glass surfaces.
- Made of aluminium sheet, discharge elements made of extruded aluminium profiles, connecting elements made of stainless steel.
- Possible version with or without end connections
- Diffusers length 500-2000 mm in 100 mm increments

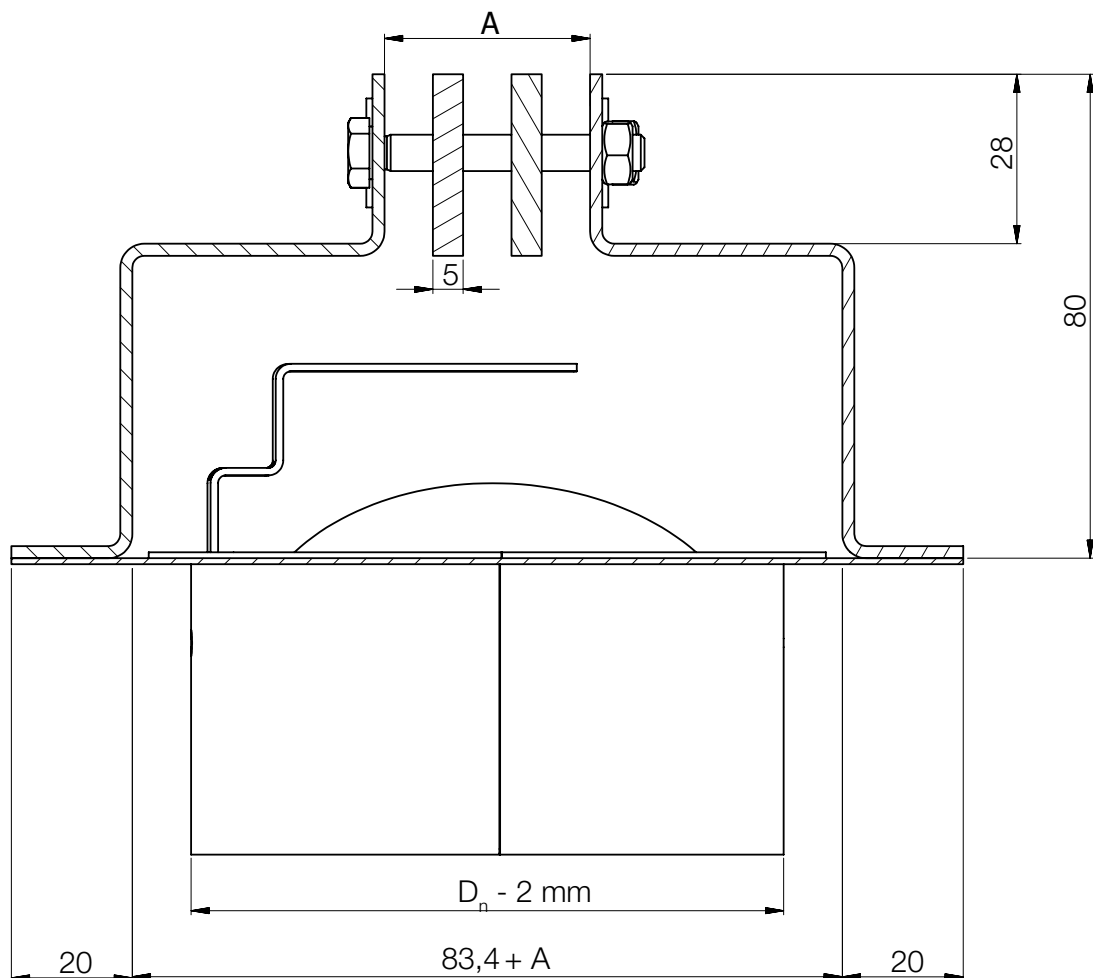

- ▼ [Product overview](#)
- ▼ [Ordering key](#)
- ▼ [Installations](#)



DIFFUSER PDI


AIR DISTRIBUTION

DIMENSIONS

		Sloth width					
		6 mm	8 mm	10 mm	12 mm	15 mm	
A mm	No. of slots	1	6	8	10	12	15
		2	17	21	25	29	35
		3	28	34	40	46	55
		4	39	47	55	63	75

		6 mm			8 mm			10 mm			12 mm			15 mm		
		V _{min} [m³/h]	V _{max} [m³/h]	n x D _n	V _{min} [m³/h]	V _{max} [m³/h]	n x D _n	V _{min} [m³/h]	V _{max} [m³/h]	n x D _n	V _{min} [m³/h]	V _{max} [m³/h]	n x D _n	V _{min} [m³/h]	V _{max} [m³/h]	n x D _n
No. of slots	1	45	90	2xø80	55	110	2xø80	70	145	3xø80	90	180	3xø80	105	215	4xø80
	2	90	180	2xø80	110	220	4xø80	140	290	5xø80	180	360	4xø100	210	430	5xø100
	3	135	270	3xø100	165	330	4xø100	210	435	5xø100	270	540	6xø100	315	650	4xø125
	4	180	360	4xø100	220	440	5xø100	280	560	6xø100	360	720	5xø100	420	860	6xø125

* Flow values in the table are expressed for a diffuser length of 1 m

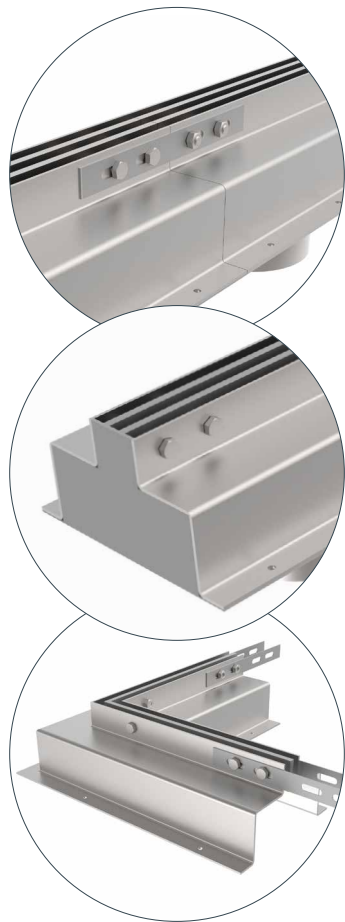

Easy connection of multiple diffusers in line with serial connection piece

End plate

Corner connection

Diffuser lenght combinantions

One diffuser
Ordering key: **0-2**
(0 connection plates, 2 end plates)



Two diffusers
Ordering key: **0-1**
(0 connection plates, 1 end plate)

Ordering key: **2-1**
(2 connection plates, 1 end plate)



Three diffusers
Ordering key: **0-1**
(0 connection plates, 1 end plate)

Ordering key: **2-0**
(2 connection plates, 0 end plate)

Ordering key: **2-1**
(2 connection plates, 1 end plate)



Four or more diffusers
Ordering key: **0-1**
(0 connection plates, 1 end plate)

Ordering key: **2-0**
(2 connection plates, 0 end plate)

Ordering key: **2-0**
(2 connection plates, 0 end plate)

Ordering key: **2-1**
(2 connection plates, 1 end plate)



*Use this ordering key for extra pices



- ▼ [Product overview](#)
- ▼ [Ordering key](#)
- ▼ [Installations](#)



 DIFFUSER PDI

AIR DISTRIBUTION

ORDERING KEY PDI

(1) Diffuser model (2) Number of slots (3) Sloth width (4) Diffuser length (5) Connection / End (6) Regulation

PDI	-	2	-	10	-	1600	-	2-0	-	/
-----	---	---	---	----	---	------	---	-----	---	---

- (1) PDI

(2) **1/2/3/4**

(3) Sloth width **6,8,10,12,15** mm

(4) Diffusers length
(**500...2000** mm in 100 mm increments)
- (5) **0-1** - 0 connection plates, 1 end plate
0-2 - 0 connection plates, 2 end plate
2-0 - 2 connection plates, 0 end plate
2-1 - 2 connection plates, 1 end plate

(6) **P** - bottom plate with regulation


ORDERING KEY Accessories

(1) Diffuser model (2) Corner section (3) Number of slots (4) Sloth width

PDI-A	-	CS	-	2	-	10
-------	---	----	---	---	---	----

- (1) **PDI-A**
- (2) **CS** - Corner section (300x300 mm)
- (3) **1/2/3/4**
- (4) Sloth width **6,8,10,12,15** mm

Installation process

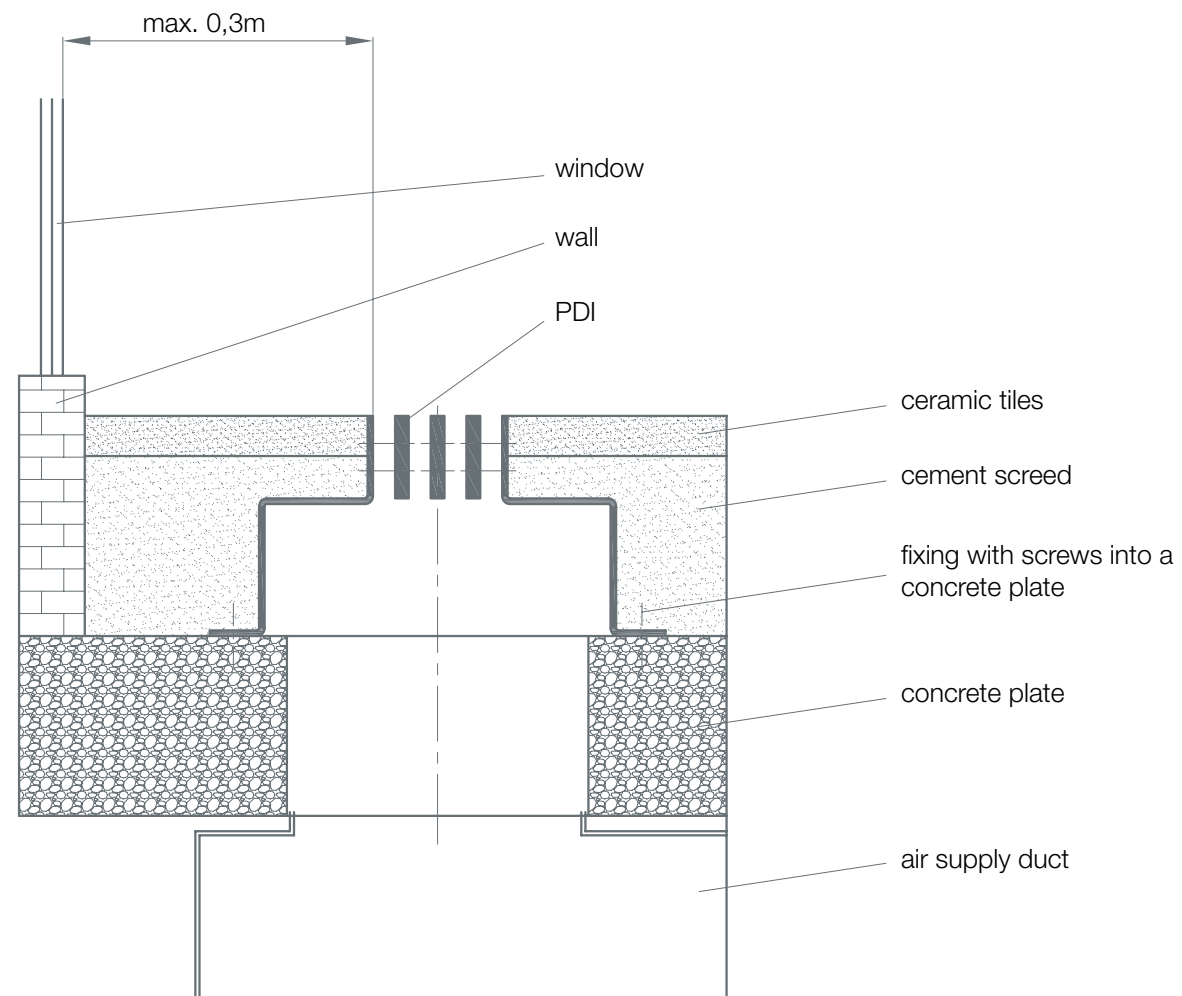

- ▼ [Product overview](#)
- ▼ [Ordering key](#)
- ▼ [Installations](#)



Damper control

Move the dampers with metal rod true the slots.





AIR DISTRIBUTION

Images are for informational purposes only and may differ from the actual product.
Follow the latest versions of the catalog on the website.

📍 Gradna 78A, 10430 Samobor, Croatia
☎ +385 (0)1 33 62 513
✉ info@klimaoprema.com
🌐 www.klimaoprema.com